



# Smart surface tubed 115 LED GI

131401XX\_131402XX\_131403XX




VISUALIZATION WITH 'SMART CAKE'  
 READ 'CAN BE USED WITH  
 SMART 115 FIX GE'  
 FIXTURE NOT INCLUDED

(not possible with Smart 115 adjustable in TRE version)


Disconnect fixture connectors  
 and pull wires through opening

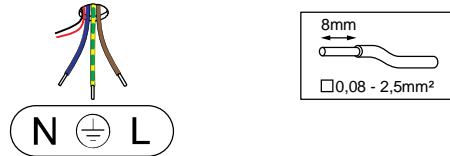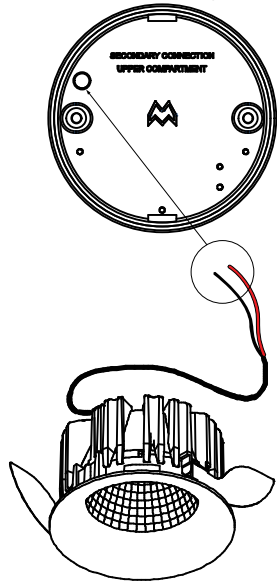


connect dim-wiring  
 to gear for:

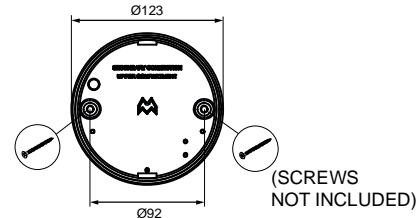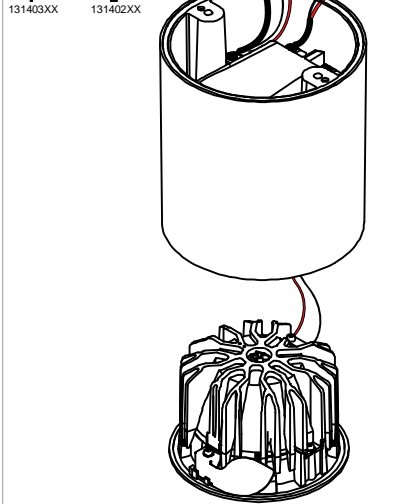

IP54 only when used with included O-ring  
 and combined with 'Smart 115 IP54' fixture

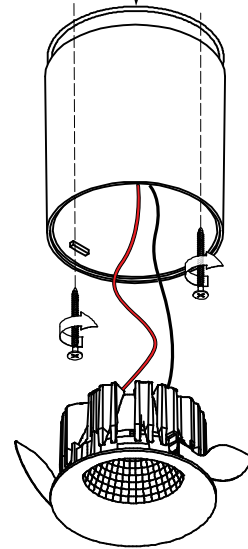

Driver pre-set @500mA




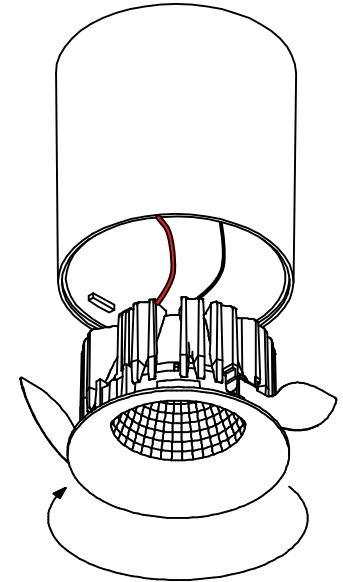


install: 1) turn counterclockwise until click  
 2) turn shortly clockwise to secure into tube  
 uninstall: turn counterclockwise and pull Smart out

## CAN BE USED WITH

- 12741XXX - Smart Cake 115 LED GE
- 12742XXX - Smart Cake 115 IP54 LED GE\*
- 12743XXX - Smart Cake 115 diffuse IP54 LED GE\*
- 12751XXX - Smart Lotis 115 LED GE
- 12752XXX - Smart Lotis 115 IP54 LED GE\*
- 12753XXX - Smart Lotis 115 diffuse IP54 LED GE\*
- 12761XXX - Smart Kup 115 LED GE
- 12762XXX - Smart Kup 115 IP54 LED GE\*
- 12763XXX - Smart Kup 115 diffuse IP54 LED GE\*

\*Use included O-ring to retain IP54 rating

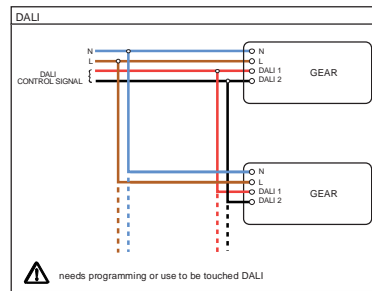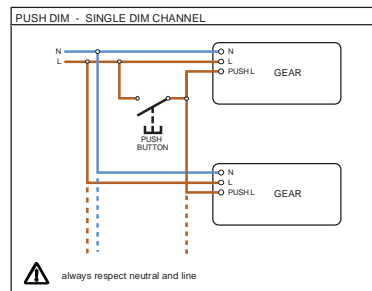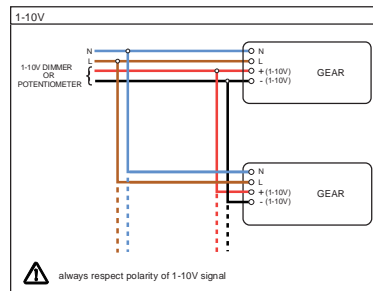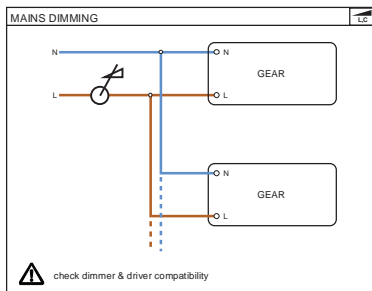

220-230V 50-60Hz IP 54 1-10V PUSH DALI L,C